

Инструкция по работе с программным телефоном ZoIPer для компьютеров под Windows и Linux

В первую очередь отметим, что для совершения вызовов Вам необходимо подписать Договор с ООО «РадиоЛинк» на услуги связи и получить реквизиты доступа.


Установка программы

Для начала работы Вам необходимо скачать программу ZoIPer с сайта разработчиков <http://www.zoiper.com> и установить её на свой компьютер.


Настройка программы

Внимание: В связи с тем, что на сайте <http://www.zoiper.com> версия программы может изменяться, то и внешний вид интерфейса установки тоже может быть изменен.

1. Запустите программу, для бесплатного использования нажмите «Продолжить» (*Continue as a Free user*).

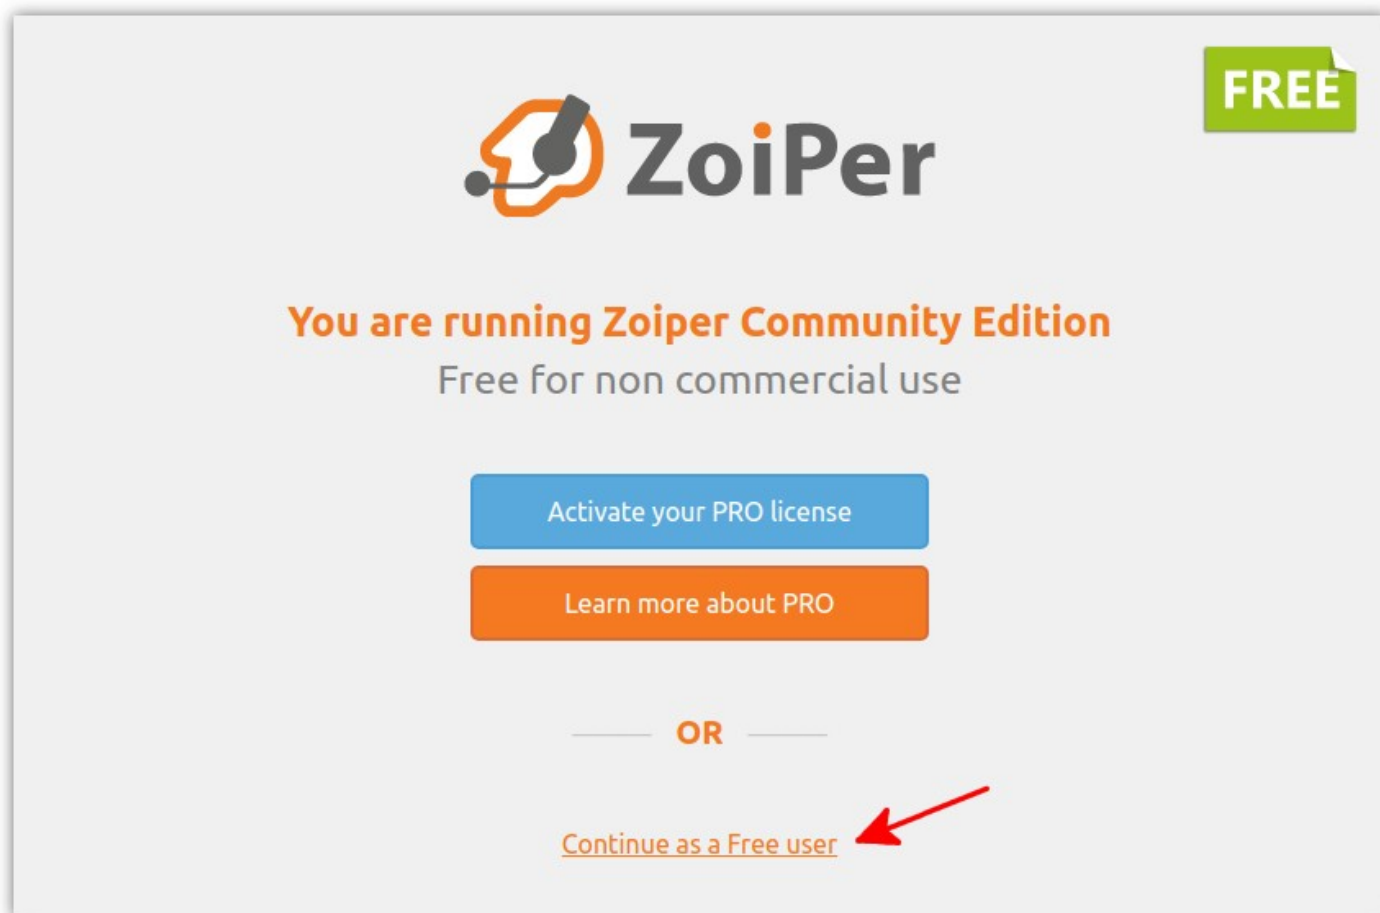


2. Введите в соответствующие поля Ваши логин с паролем из Бланка заказа к подписанному Договору и нажмите на кнопку «Авторизоваться» (*Login*).

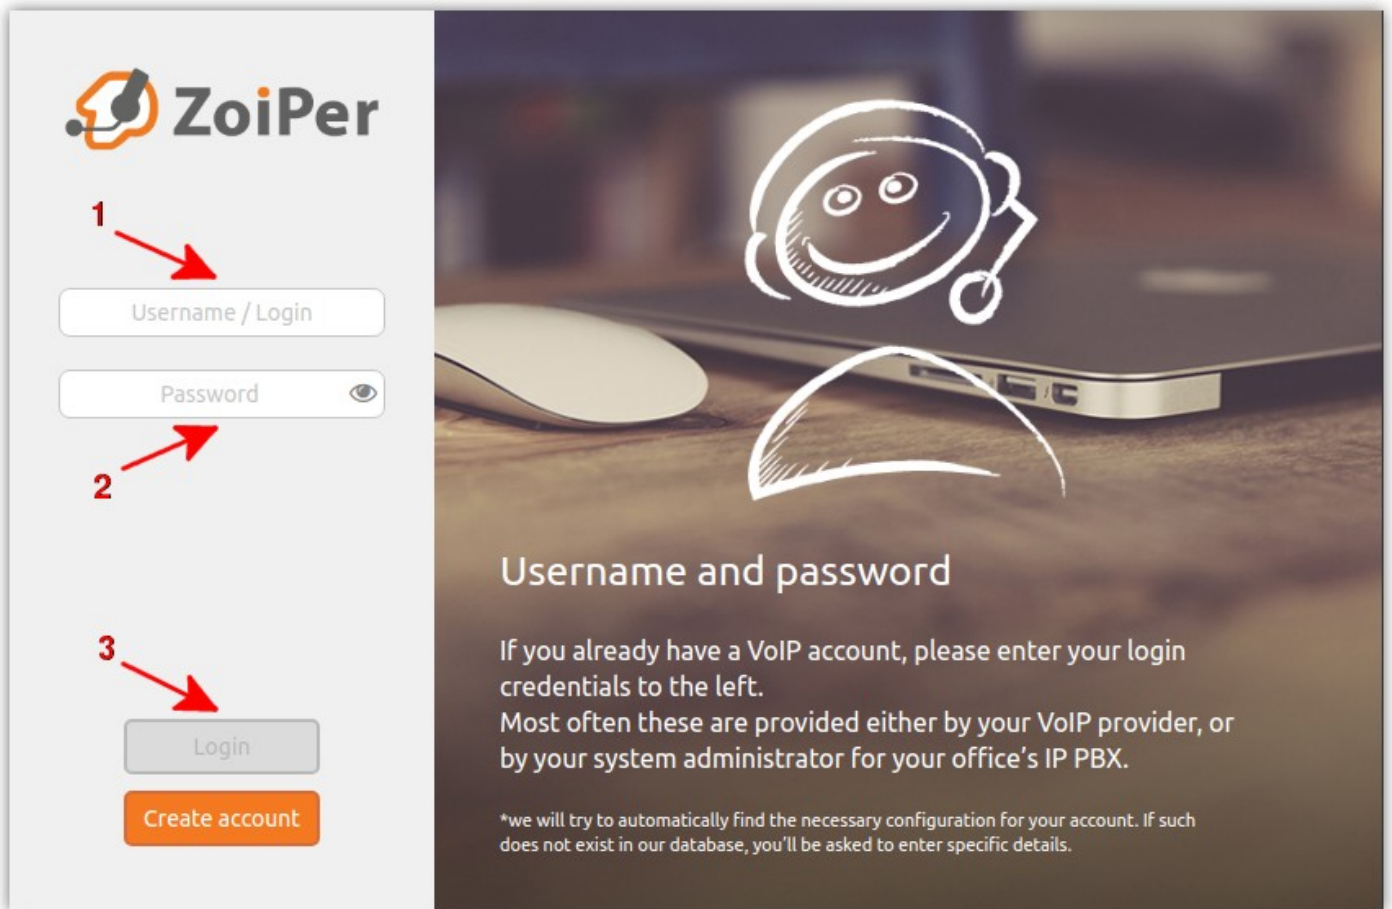

The image shows a login interface for ZoiPer. On the left, there is a grey sidebar with the ZoiPer logo at the top. Below the logo, there are three numbered red arrows pointing to the login fields and button: arrow 1 points to the 'Username / Login' input field, arrow 2 points to the 'Password' input field, and arrow 3 points to the 'Login' button. Below the 'Login' button is an orange 'Create account' button. The main content area on the right has a background image of a laptop and mouse with a white line-art drawing of a smiling person's head. The text in this area reads: 'Username and password', 'If you already have a VoIP account, please enter your login credentials to the left. Most often these are provided either by your VoIP provider, or by your system administrator for your office's IP PBX.', and a small asterisk note: '*we will try to automatically find the necessary configuration for your account. If such does not exist in our database, you'll be asked to enter specific details.'


2. В качестве «Имени хоста» (*Hostname*) введите один из указанных ниже адресов и нажмите кнопку «Дальше» (*Next*):

- Для номеров Ижевска: **193.227.252.70**
- Для номеров Глазова: **194.79.33.14**
- Для номеров Воткинска: **193.227.252.82**

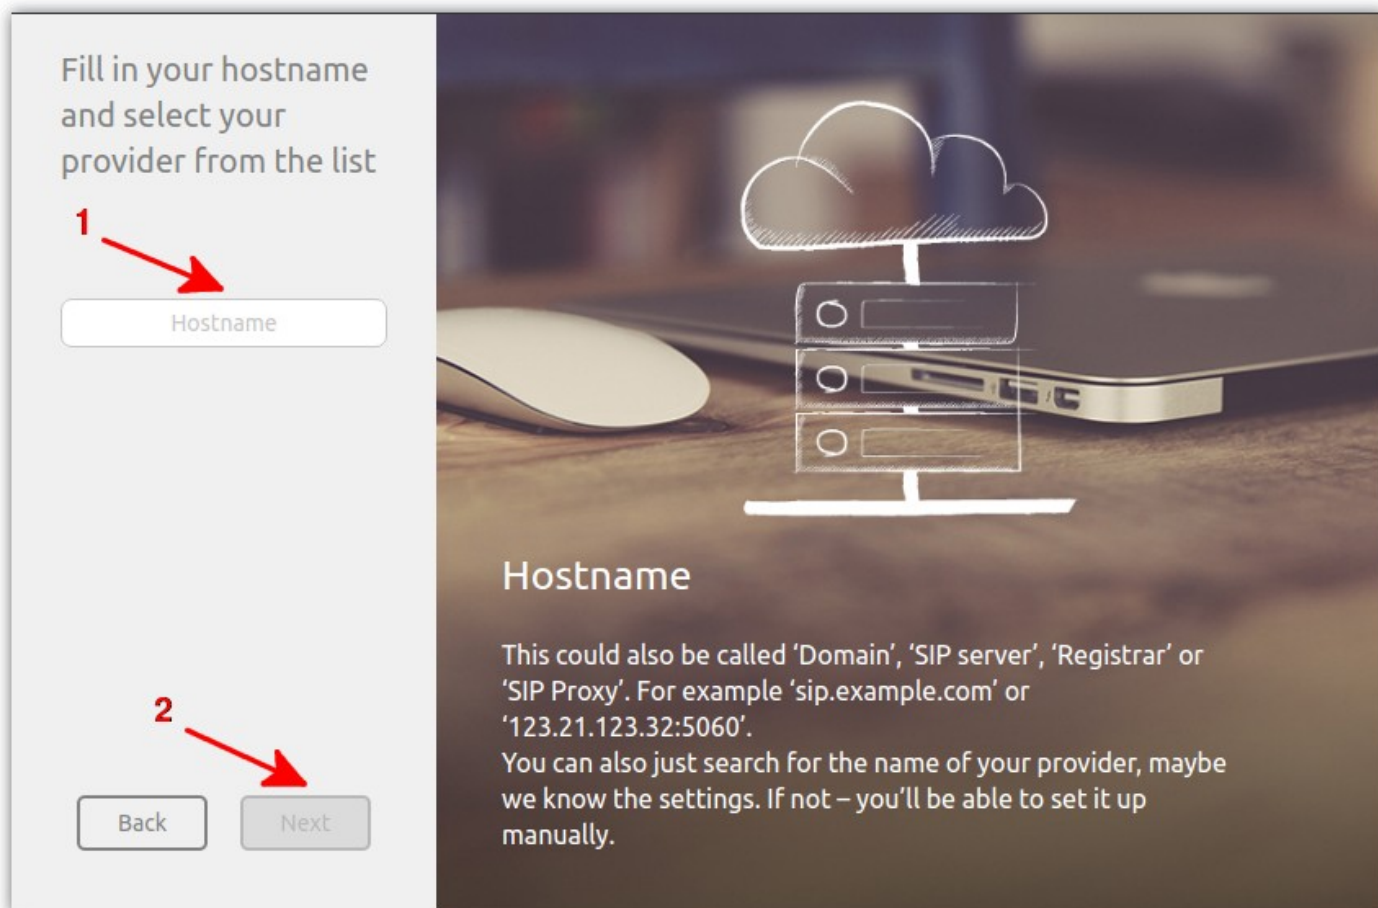

The screenshot shows a software installation wizard window. On the left, a light gray sidebar contains the text "Fill in your hostname and select your provider from the list". Below this text is a text input field labeled "Hostname" with a red arrow and the number "1" pointing to it. At the bottom of the sidebar are two buttons: "Back" and "Next", with a red arrow and the number "2" pointing to the "Next" button. The main area of the window has a dark background with a white line-art illustration of a server rack under a cloud. Below the illustration, the text reads: "Hostname", "This could also be called 'Domain', 'SIP server', 'Registrar' or 'SIP Proxy'. For example 'sip.example.com' or '123.21.123.32:5060'. You can also just search for the name of your provider, maybe we know the settings. If not – you'll be able to set it up manually."

3. Следующий шаг по настройке исходящего прокси-сервера можно пропустить, нажав на кнопку «Пропустить» (*Skip*).

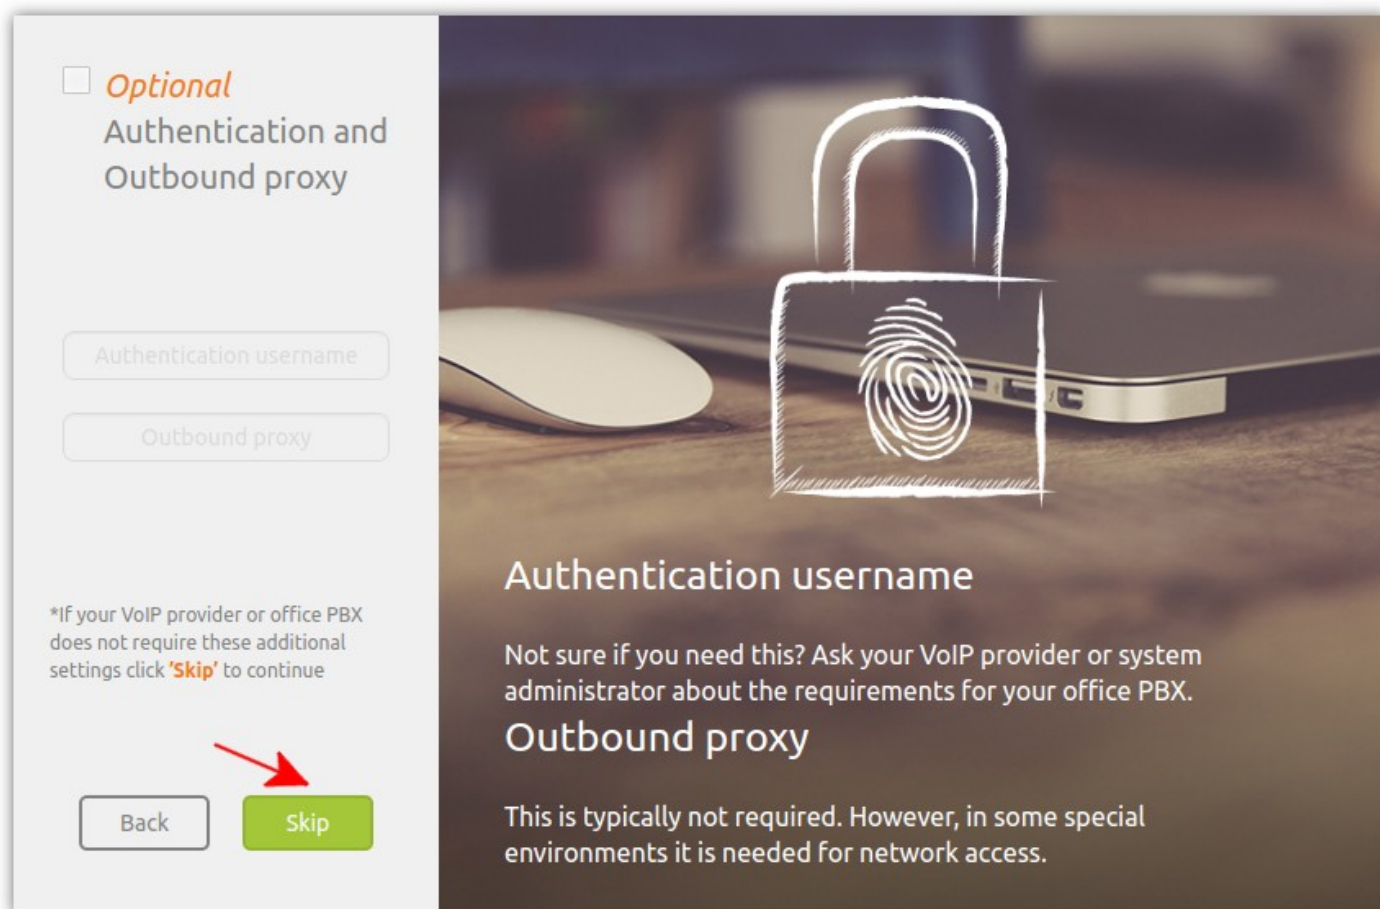

The screenshot shows a configuration window with a light gray sidebar on the left and a dark gray main area on the right. The sidebar contains a checkbox labeled 'Optional Authentication and Outbound proxy', two input fields for 'Authentication username' and 'Outbound proxy', a note about VoIP providers, and 'Back' and 'Skip' buttons. A red arrow points to the 'Skip' button. The main area features a background image of a laptop with a white padlock and a fingerprint icon overlaid. Text in the main area includes 'Authentication username', 'Outbound proxy', and explanatory text for both.

Optional
Authentication and
Outbound proxy

Authentication username

Outbound proxy

*If your VoIP provider or office PBX does not require these additional settings click '**Skip**' to continue

Back Skip


Authentication username

Not sure if you need this? Ask your VoIP provider or system administrator about the requirements for your office PBX.


Outbound proxy

This is typically not required. However, in some special environments it is needed for network access.


4. В случае, если реквизиты для подключения были введены верно, программа обнаружит конфигурацию, после чего нажмите на кнопку «Дальше» (*Next*).

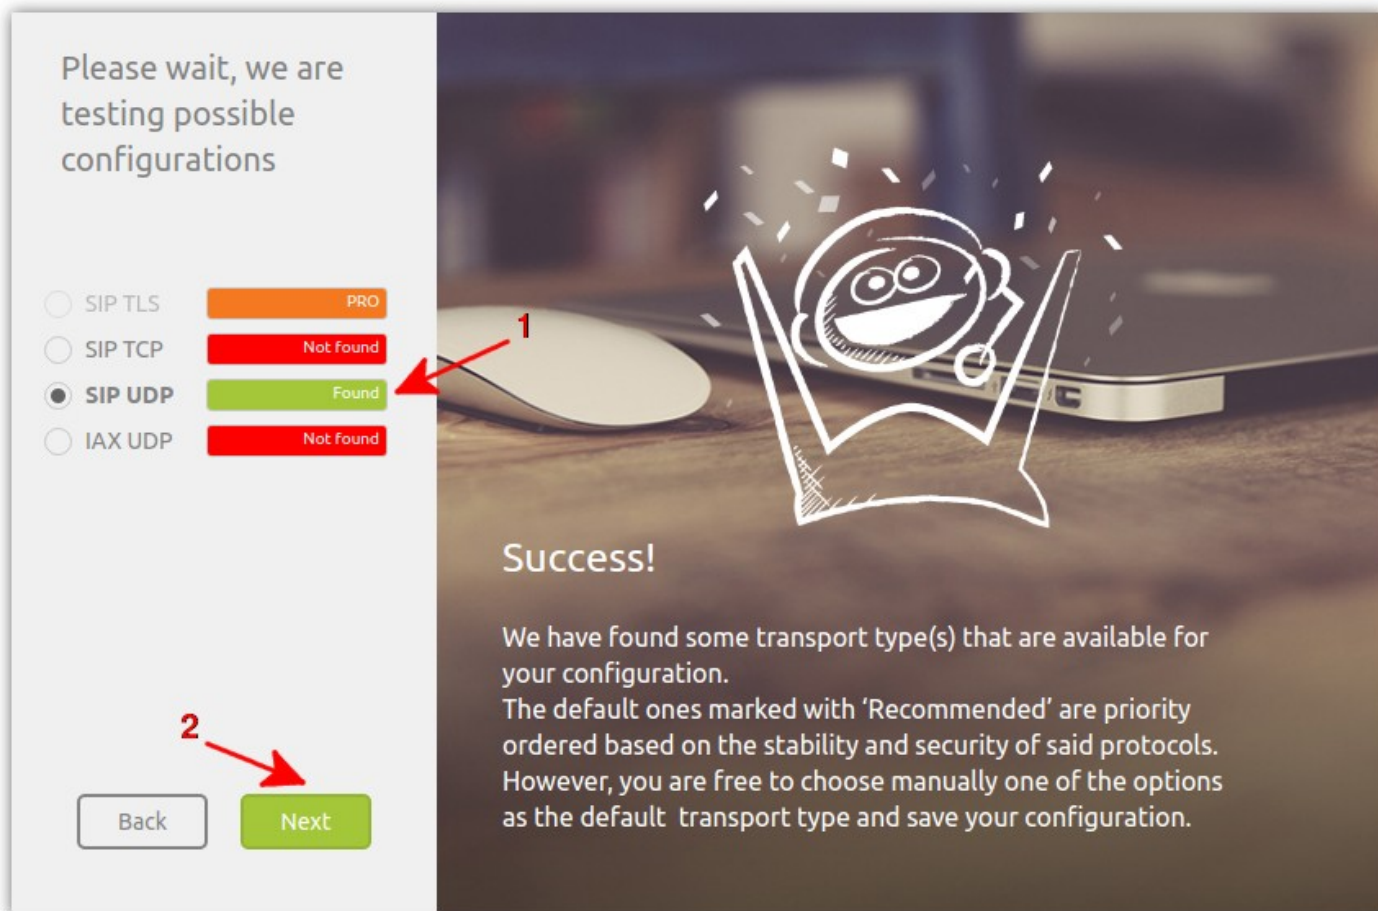


5. На следующем этапе можно протестировать Ваши устройства (рекомендуется): динамики, микрофон, веб-камеру. Для этого нажмите на кнопку «Конфигурация» (*Configure*). Для того чтобы произвести настройку Ваших устройств позже, нажмите на кнопку «Пропустить» (*Skip*).

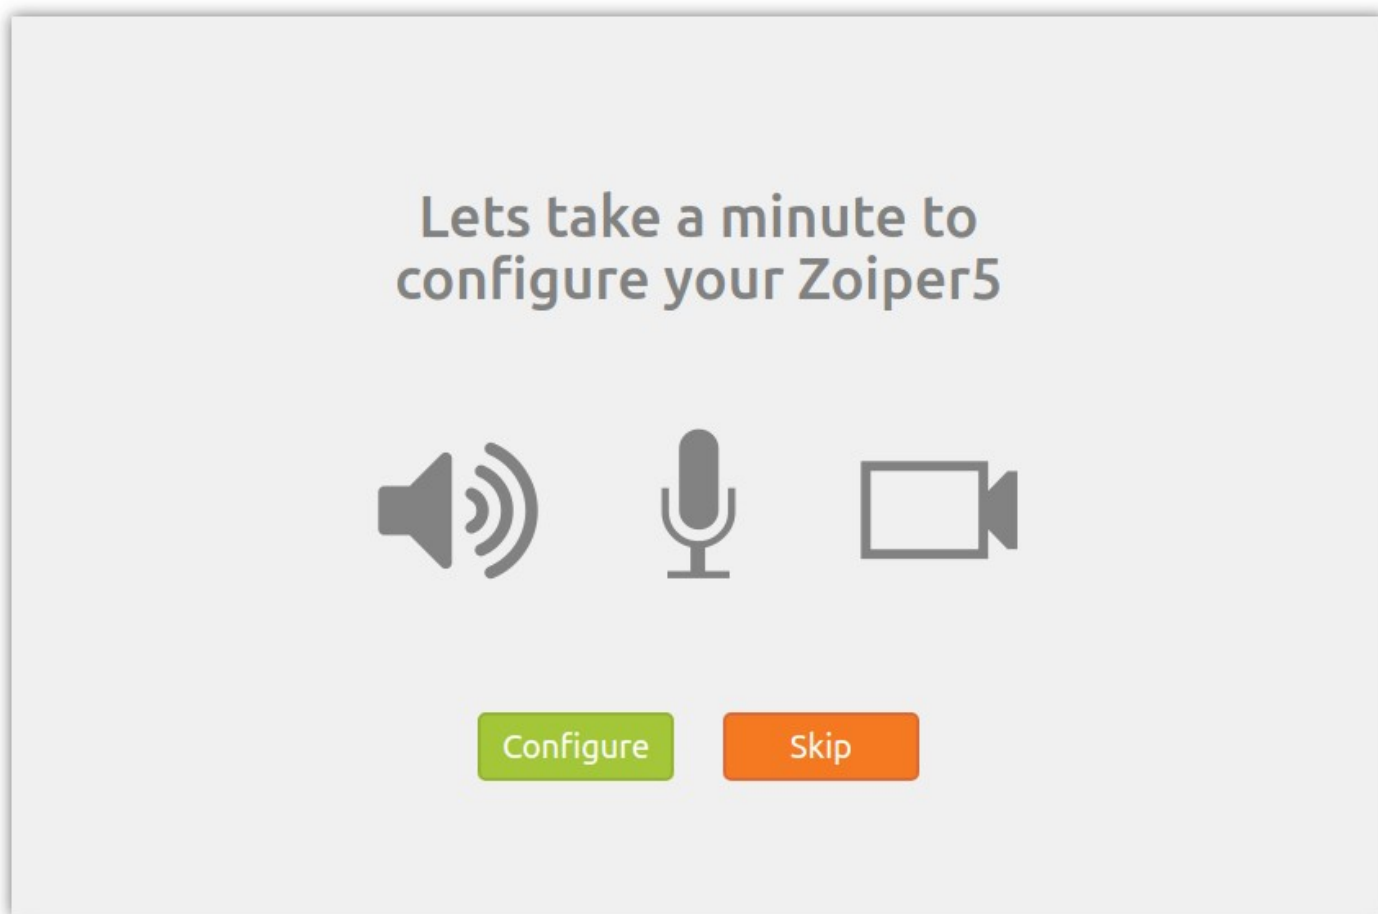


Работа с программным IP-телефоном



При необходимости выбора русского языка интерфейса зайдите через меню настроек  в раздел «Язык» (Language) и выберите соответствующий пункт.

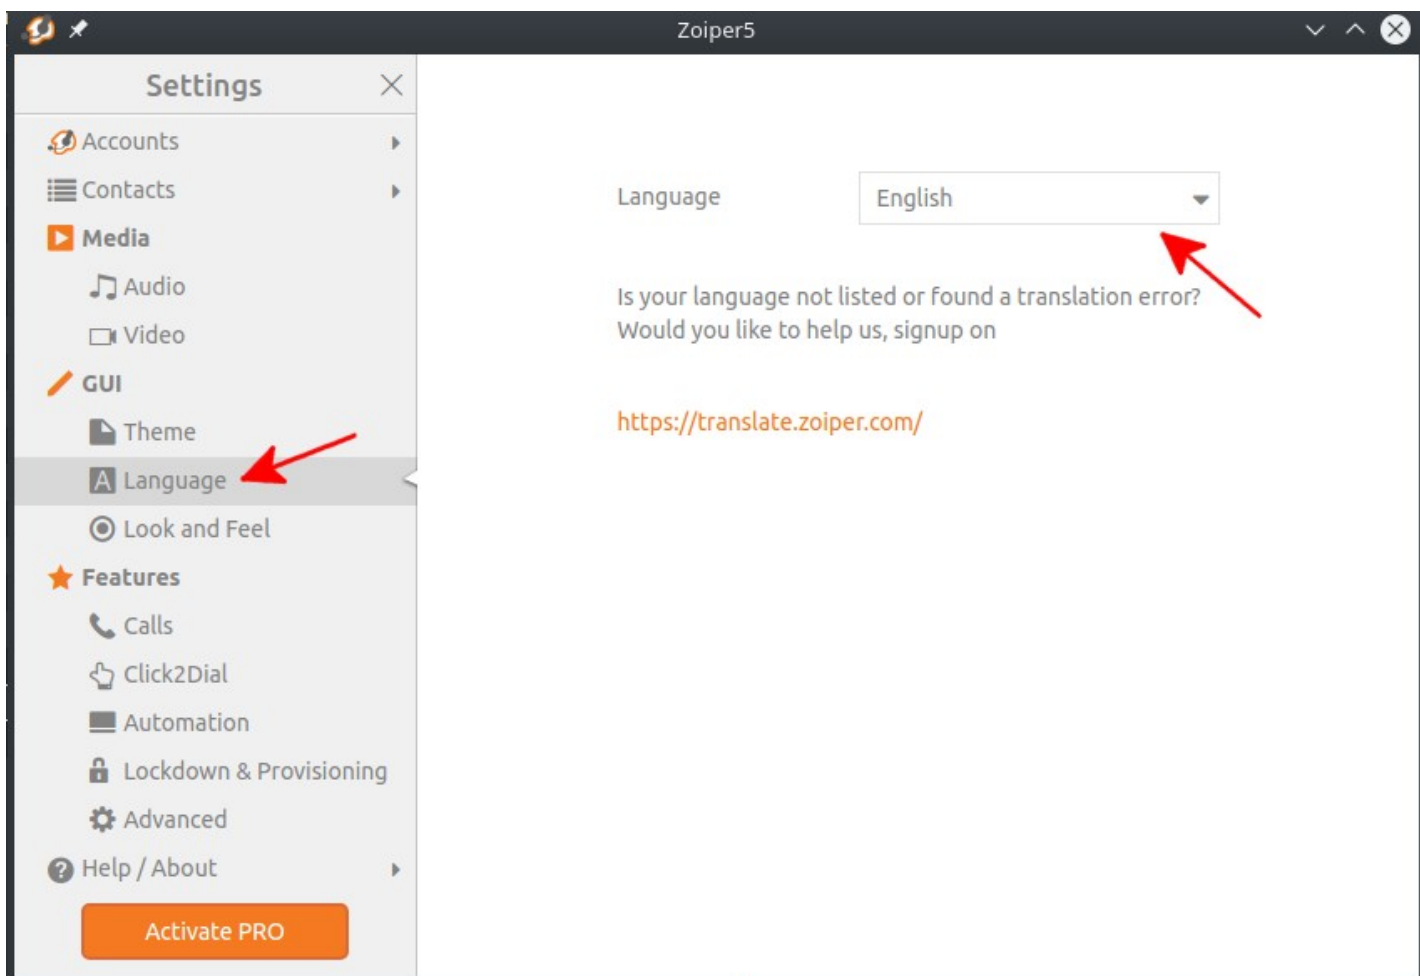

После запуска программы произойдёт автоматическое соединение с сервером РадиоЛинк. Если соединение успешно установлено, то на экране программы появится соответствующий значок (галочка). Это означает, что Ваш программный телефон готов совершать вызовы по IP-сети.

Для начала рекомендуем Вам сделать тестовый вызов на сервисный номер **11810** и проверить работу микрофона, а также качество связи.

Для совершения звонка необходимо ввести номер абонента с помощью клавиатуры, либо с помощью панели кнопок в окне программы, и нажать на кнопку вызова 

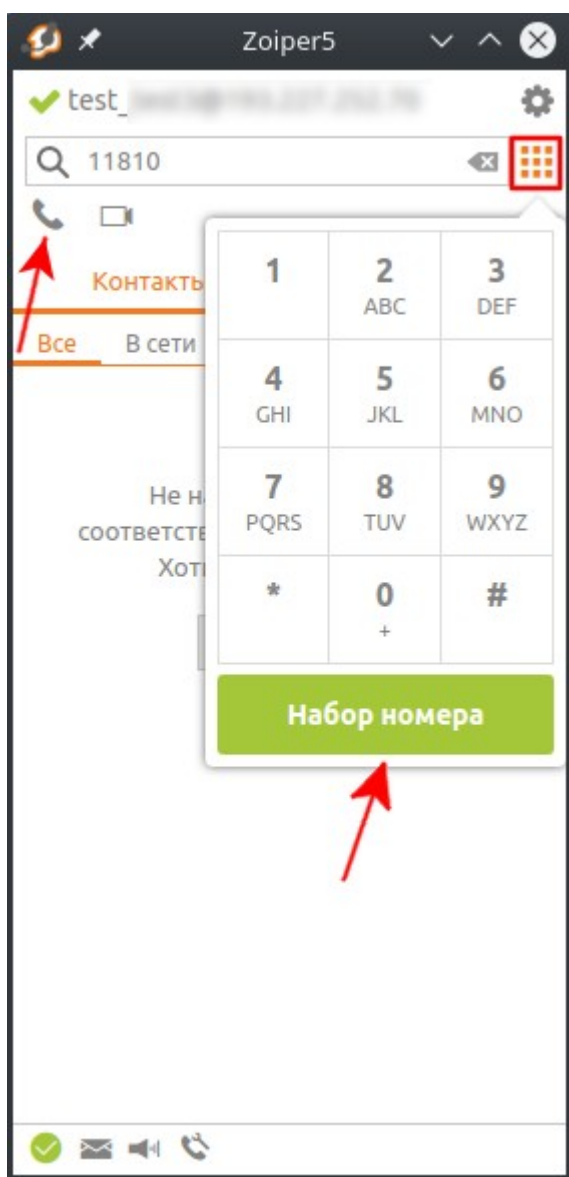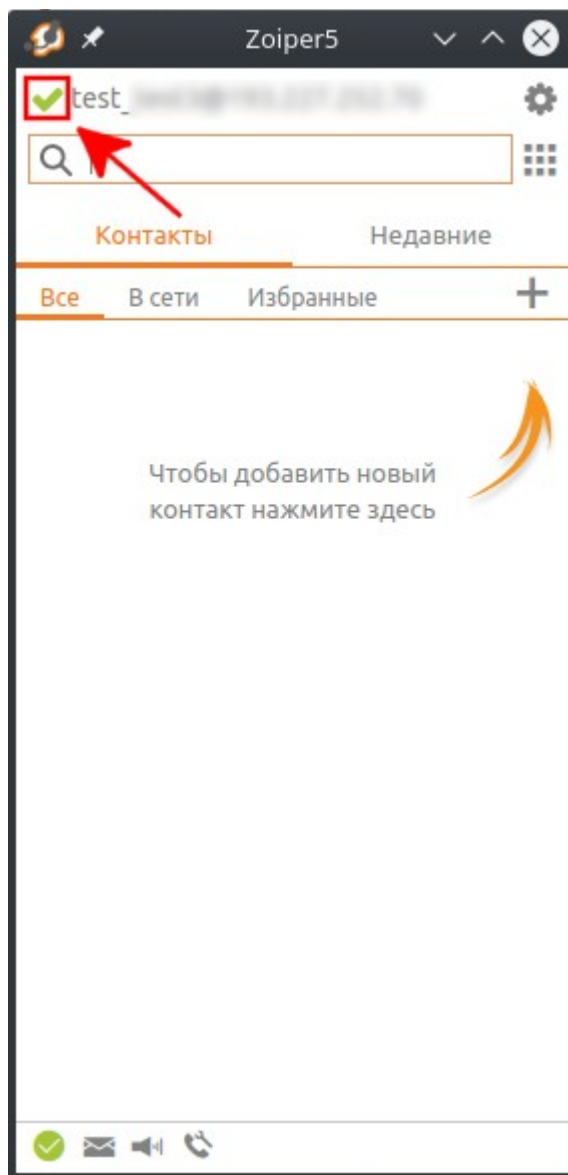

Удачных Вам соединений!